



## 75" Outdoor Interactive Double Sided Kiosk



**FHD** High Definition **24/7** Support 24/7 Operation

**Smart** Thermal Management **Wide** Viewing Angle

**Easy** Easy installation  Heating/Cooling System

 LED backlight Energy-saving **Industrial** Metal Frame Housing




## Features

**Full Outdoor Metal Housing** The unit offers waterproof,dustproof and mothproof metal housing with vandal-resistant Tempered Glass(6mm).

**Support 24/7 operation** The long-life LCD Panel has high reliability and stability to ensure the system running continuously in the whole year.

**Timer On/Off** The auto power On/Off setting allows to make display schedules every day or every week and extends the unit' life time.

**Built-in Thermoelectric Air Conditioner** This equipment is environment-friendly, No water,No compressor, No freon,No vibration, No leak. It will work(cooling or heating) when the unit is up to the given temperature.It ensures the unit runs 24/7 operation normally in all-weather and outdoor environment.



**Built in Android System** ARM Cortex A53,1.5GHZ;GPU:ARM Mali-450 2GB Memory;DDR3;8G Flash Build in EMMC,OS 7.1Version

**Energy-saving with LED backlight** The LCD panel with LED backlight has lower power consumption compared to displays with CCFL backlight, which can help save massive energy throughout the year.

**Multiple Interfaces** The unit offers abundant interfaces-- HDMI/VGA/JR45/USB to meet different peripherals.



**Auto Brightness Control** The unit can adjust the brightness automatically according to the external light intensity.

**Built in Touch Foil** 10Points Touch function



## Specifications&Drawings

|                          |   |
|--------------------------|---|
| Model                    | XT750EVL D                                    |
| Screen Size              | 75 inch                                       |
| Resolution               | 3840x2160                                     |
| Product Size(mm)         | 1198(h)x2423.9(v)x302(d)                      |
| Display Size (mm)        | 1649.7(h)x928(v)                              |
| Brightness               | 2500cd/m <sup>2</sup>                         |
| Colors                   | 8bit,16.7M                                    |
| Contrast Ratio           | 1100:1  |
| Viewing Angle            | ±178°   |
| Input Power Voltage      | AC100~240V(50Hz~60Hz)                         |
| Working Temp.            | -40° ~ +55°                                   |
| Interface Type           | VGA/HDMI/RJ45                                 |
| Response Time            | 8ms   |
| Life Time                | 50000   |
| Accessories              | Remote control, Power Cord, CD,HDMI Cord,Keys |
| Built-in Air Conditioner | Refrigerating capacity: 450W                  |
|                          | Voltage: 48V(DC)                              |
|                          | Current: 9.2A                                 |
| Packing Size(mm)         | 1455(l)x995(w)x2605(h)                        |
| Gross Weight(kg)         | Approx 400kg                                  |

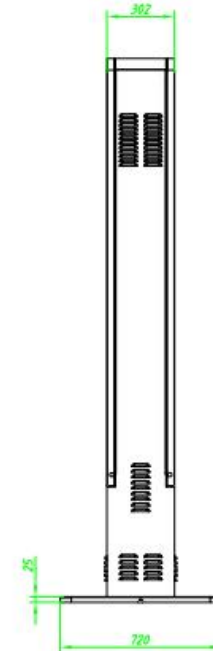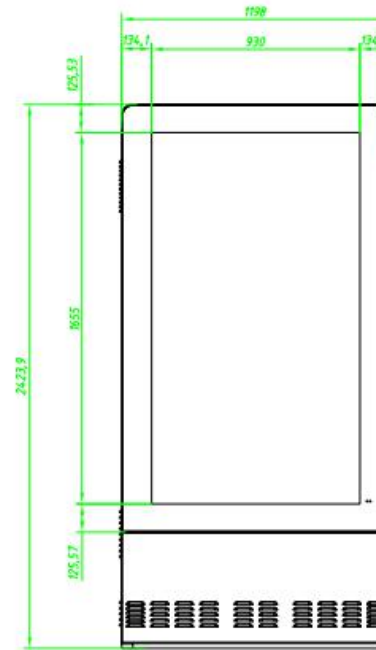



## Photos for unit

