






70" Outdoor Digital Signage with 700nits



- FHD** High Definition
- 24/7** Support 24/7 Operation
-  **Timer On/Off**
- Multi-Inputs** HDMI VGA DVI
Audio BNC
- Smart** Thermal Management
- Wide** Viewing Angle
- Easy** Easy installation
-  **Cooling System**
-  **LED backlight**
Energy-saving
- Industrial** Stainless Housing



Features

Full Outdoor Stainless Housing The unit offers waterproof,dustproof and mothproof metal housing with tempered Glass(6mm).

Support 24/7 operation The long-life LCD Panel has high reliability and stability to ensure the system running continuously in the whole year.

Timer On/Off The auto power On/Off setting allows to make display schedules every day or every week and extends the unit' life time.

Built-in Industrial Fans Metal material for fan flades. It will work(cooling) when the unit is up to the given temperature.It ensures the unit runs 24/7 operation normally in special outside environment



Remote Management & Configuration via RS232 Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Therefore,A Multiple Display Control,helping various displays to be easily and simultaneously operated on PC,is possible with the RS232 function.

Energy-saving with LED backlight The LCD panel with LED backlight has lower power consumption compared to displays with CCFL backlight, which can help save massive energy throughout the year.

Multiple Interfaces The unit offers abundant interfaces--HDMI/VGA/DVI/RS232/BNC to meet different peripherals.

Auto Brightness Control The unit can adjust the brightness automatically according to the external light intensity.


Optional Features:

- ❖ Built-in Mini PC/Camera/Speakers;
- ❖ With Touch Screen(Touch Foil.);
- ❖ Wall Mounted Model/Double-sided for Freestanding Model.



Specifications&Drawing

Model	XT700EVL D
Screen Size	70 inch
Resolution	1920x1080
Product Size(mm)	1122(h)x2265(v)x180(d)
Display Size (mm)	871.56(h)x1549.44(v)
Brightness	700cd/m ²
Colors	8bit,16.7M
Contrast Ratio	4000:1
Viewing Angle	±178°
Input Power Voltage	AC100~240V(50Hz~60Hz)
Working Temp.	0° ~ +45°
Interface Type	VGA/HDMI/DVI-D IN,RS232/Audio/BNC IN/OUT
Response Time	8ms
Life Time	50000
Accessories	Remote control, Power Cord, CD,HDMI Cord,Keys
Packing Size (Wooden Box)mm	1310(h)x2490(v)x650(d)
Gross Weight(kg)	Approx250

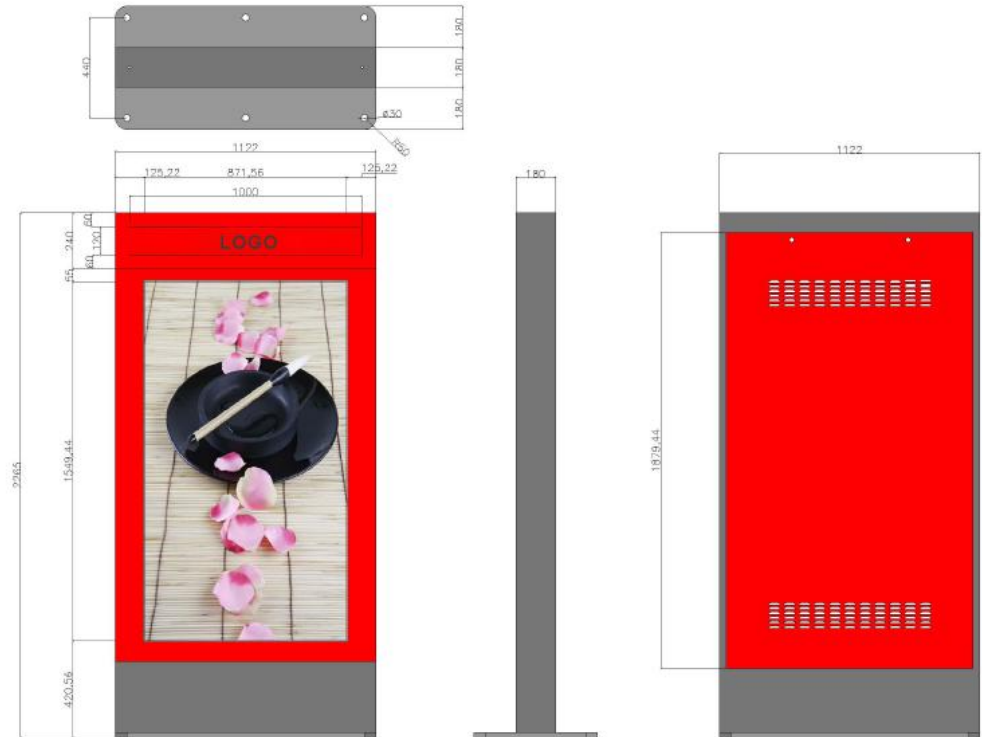



Photos for unit



Note:The panel can be opened like a door as other products we have.